

Offering higher strength compared to other aluminum alloys, Aluminum 7075 screws are most commonly used by aerospace for their combination of high strength and low weight. These fasteners offer the strength of many grades of steel at a fraction of the density (2.81 g/cc | 0.102 lb/in³). Aluminum 7075 bolts can be tempered to several different conditions (including 7075-T6), each offering various levels of strength.

Properties

Ultimate Tensile Strength	33 ksi 7075-O 73.2 ksi 7075-T73 83 ksi 7075-T6
Yield Strength at 0.2%	15 ksi 7075-O 63.1 ksi 7075-T73 73 ksi 7075-T6
Elongation %	16 7075-O 13 7075-T73 11 7075-T6
Usable Temperature Limit	752°F / 400°C

Key Benefits

- High strength with good fatigue strength
- Lightness: Weighs about 1/3 of steel
- Good ductility and toughness
- Economic strength-to-weight ratio
- Low density
- Non-magnetic


Chemistry & Specifications

Aluminum 7075-T6	Al	Zn	Mg	Cu	Fe	Si	Mn	Ti	Cr	Other
Typical %	Bal	5.1-6.1	2.1-2.9	1.2-2.0	0.50	0.40	0.30	0.20	0.18-0.28	0.05 each / 0.15 total

SPECIFICATIONS: UNS A97075, QQ-A-200/11, AMS-QQ-A-200/11, ASTM-B211, AMS 4154

Material Data

ALUMINUM 7075 STRENGTH VS TEMPERATURE

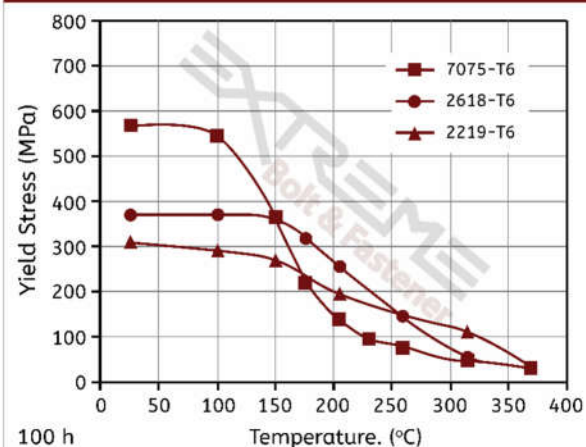

Our Engineers Are Here to Help

Americans / Asia
Europe

888.393.4517
+45 70 777 677

www.extreme-bolt.com
sales@extreme-bolt.com
europe@extreme-bolt.com